

***Perfect choice for Access Control***

Akuvox's A05C is a safe and convenient commercial-grade device for access control.

With the latest deep learning algorithm and dual IR camera liveness detection technology, A05C can be deployed in the field for community and commercial applications, for the implementation of smart access control.

***At a Glance***

- Plastic body with 5inch display;
- Linux operation system;
- Wide-angle camera: 62° (H), 36° (V);
- Two-way audio communication over IP networks with Echo Cancel feature;
- Multi-way access feature including: Face, Card, PIN, BLE & QR code;
- Surface-mounted;
- Complies with SIP & ONVIF;

***Anti-epidemic Function***

- Mask Detection
  - Body Temperature Detection
- [Only A05C(MD01) & A05C(MD02) support]

**Physical & Power**

- Housing Material: Plastic
- Display: 5 Inch IPS LCD, 1280x720
- Camera: 2M pixels, WDR
- Wiegand Port: Support
- RS485 Port: Support
- RF Card Reader: 13.56MHz, NFC
- Relay In / Out: 1 / 1
- Ethernet Port: RJ45, 10/100Mbps adaptive
- BLE: Support
- 802.3af Power-over-Ethernet
- 12V DC Connector (if not using PoE)
- Tamper: Support
- Installation: Wall-mounted
- IP Rating: IP65
- Working Humidity: 10~90%, no condensing
- Working Temperature: -20°C ~ +60°C

### Identification

- Identification Mode: Face, NFC, RFID Card, BLE & QR code

### Capacity

- Face Capacity: 20,000
- Card Capacity: 20,000
- Event Log: 50,000


### Temperature Measurement

- Only A05C(MD02) support
- Distance: 0.3M ~ 1M
- Accuracy: 0.1°C
- Deviation: ±0.3°C
- Range: 34°C ~ 45°C

### Wrist Temperature Measurement

- Only A05C(MD01) support
- Distance: 1cm ~ 5cm
- Accuracy: 0.1°C
- Deviation: ±0.3°C
- Range: 34°C ~ 45°C

### Dimensions

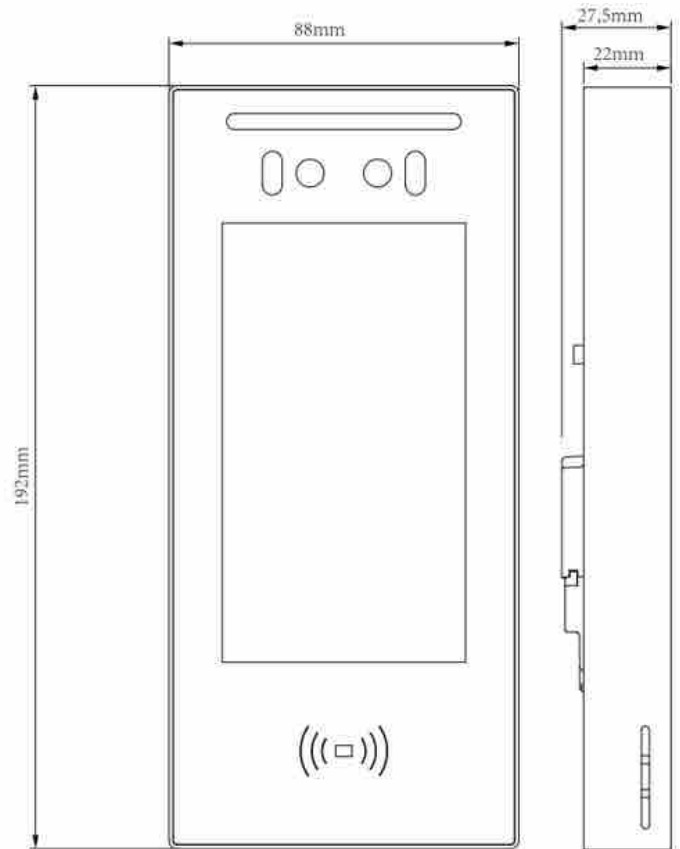

### Application

